EGS Electrical Group

SOLA/ HEVI-DUTY

Technical Services

12.20.04 Rev. 1

EGS Electrical Group

SOLA/ HEVI-DUTY

S1K UPS Wall Mount Bracket Kit

Off-Line UPS
320VA - 1200VA (115V)
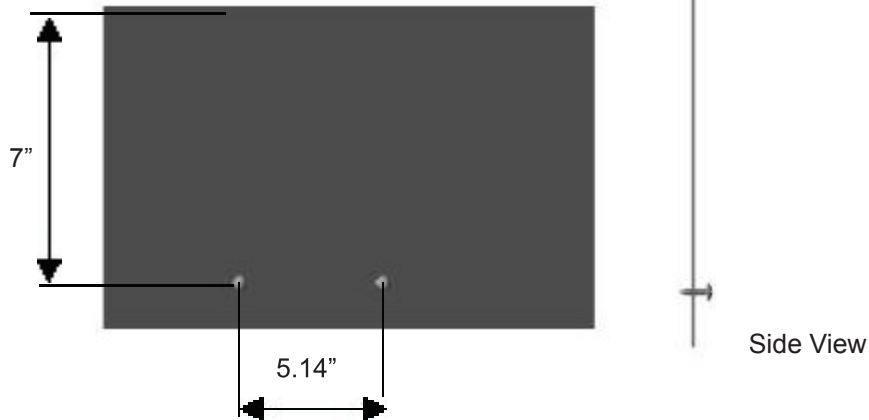

Mounting Instructions

This bracket allows the S1K UPS series (320VA – 1200VA) to be mounted to the wall/panel. One bracket kit is required for each UPS. The hardware necessary for mounting the bracket is supplied. Each kit includes the following:

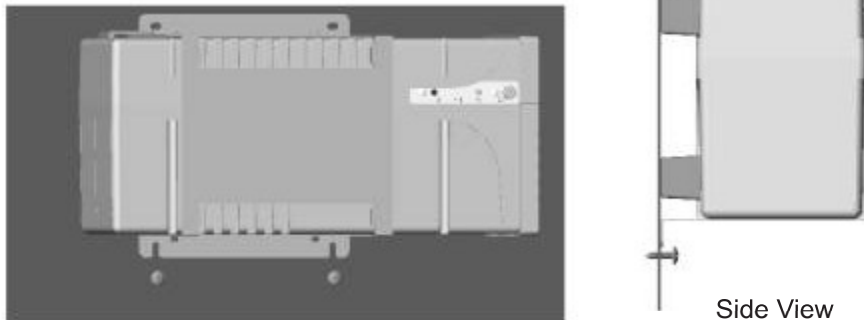1   Metallic Wall Mounting Bracket
4   Rubber Spacer Blocks
4   Screws

Step 1:

The bottom two provided screws should be mounted 5.14" apart.
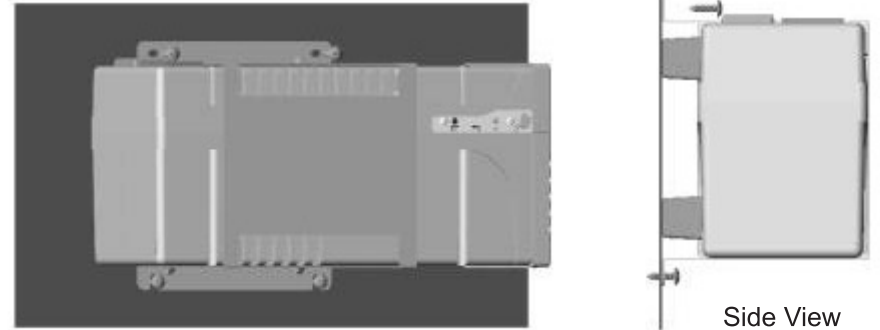
7"

5.14"

Side View

Step 2:

Affix the 4 rubber spacer blocks to the side of the UPS adjacent to the wall, to prevent the UPS from sliding out of position, as shown in step 2 figure. Place the bracket on the UPS as shown, push and secure with the 2 bottom screws.

Side View

Step 3:

Secure the top of the bracket with the provided two screws included in the kit.

Side View

Step 4:

Tighten all 4 screws and make sure the bracket and the UPS are secure.

Side View